

CITIZEN

Cincom

L20






Sliding Headstock Type CNC Automatic Lathe



The new L20 - 3 models to choose from

A machine synonymous with the history of Cincom re-designed for the new age with 3 versions depending on your requirement. From a 7 axis machine with excellent cost performance ratio to a high-end machine with B axis capability on both spindles and a back spindle with an additional Y axis. An easily removable guide bush is also standard enabling the machine to run in non-guide bush mode for shorter parts. The machine is also capable of using up to 25.4mm / 1" material with optional expansion kit.



L20 machine configuration

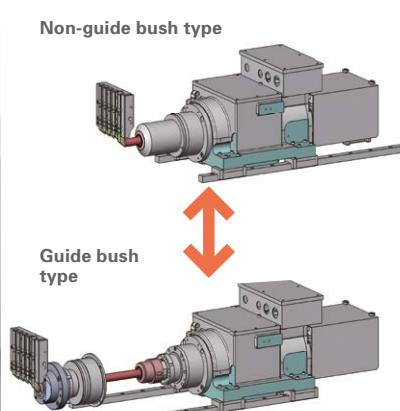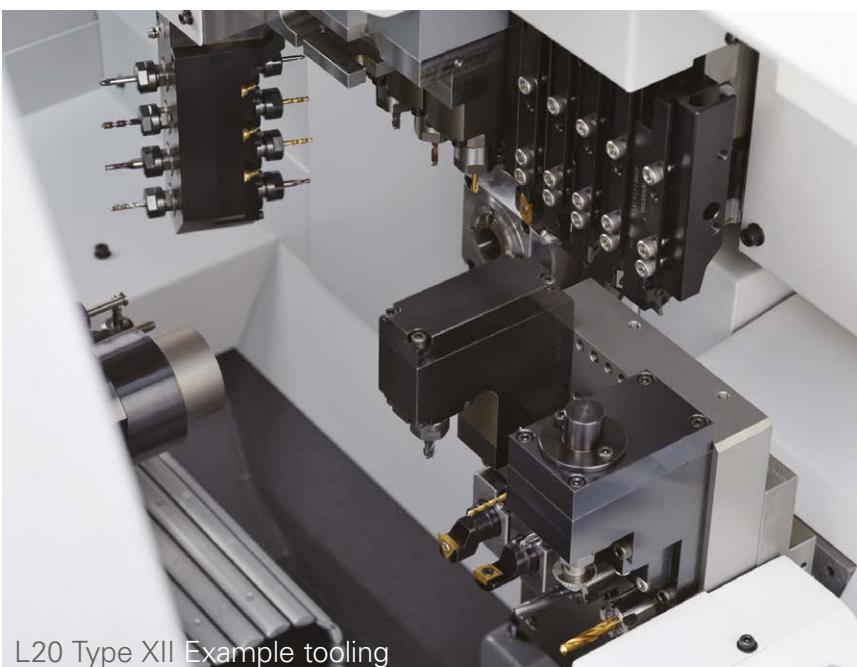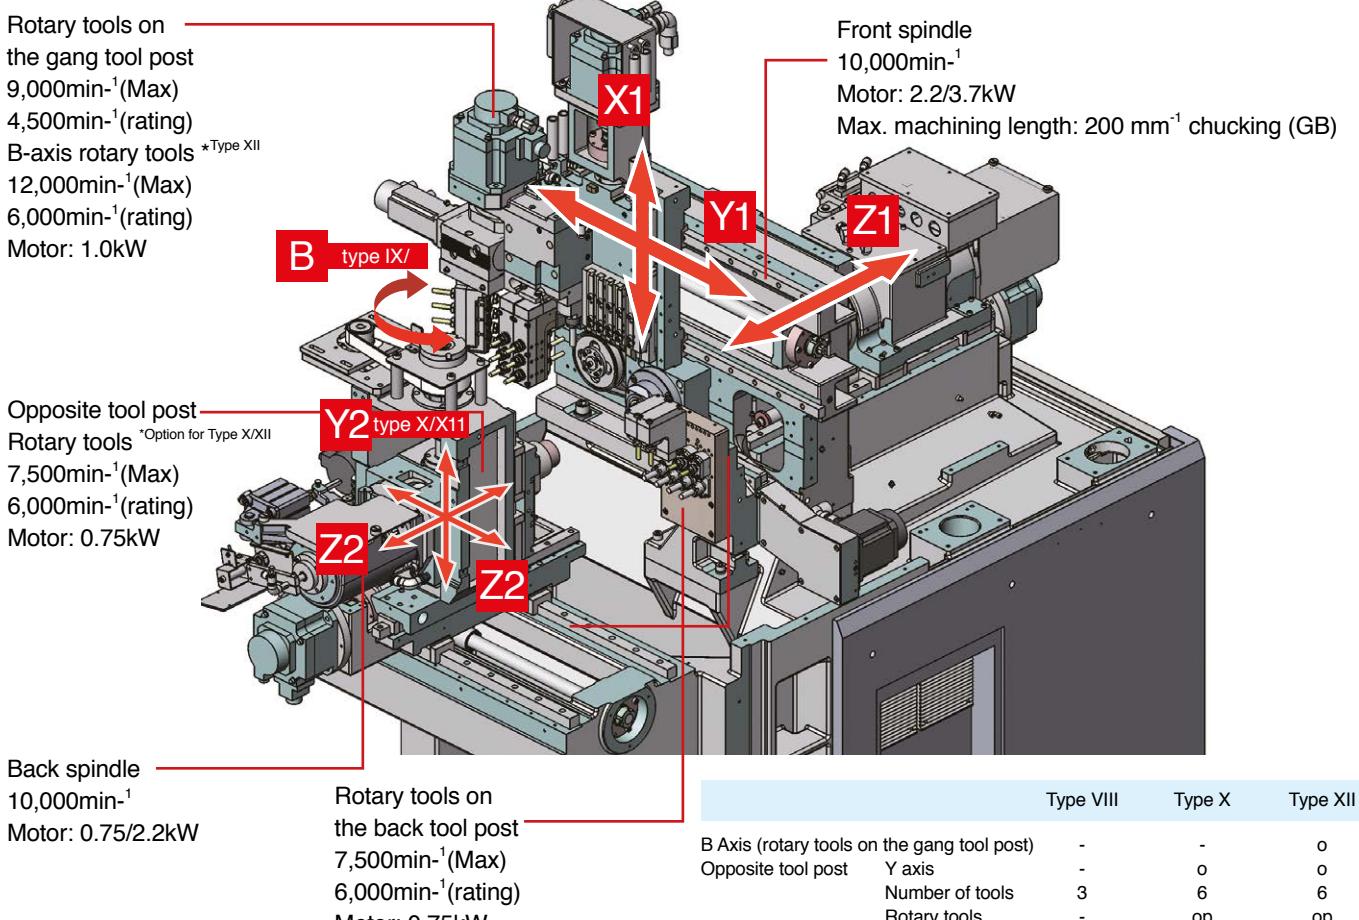



Ability to use as a guide bush type or non-guide bush type

Selectable modules to improve your productivity and profitability

Function modules that can be combined without restrictions

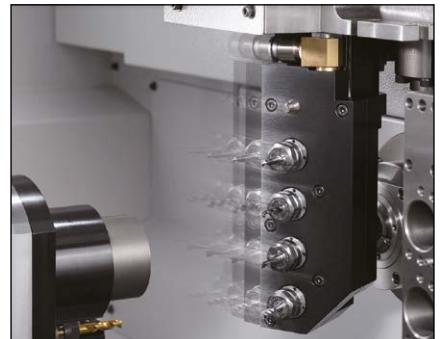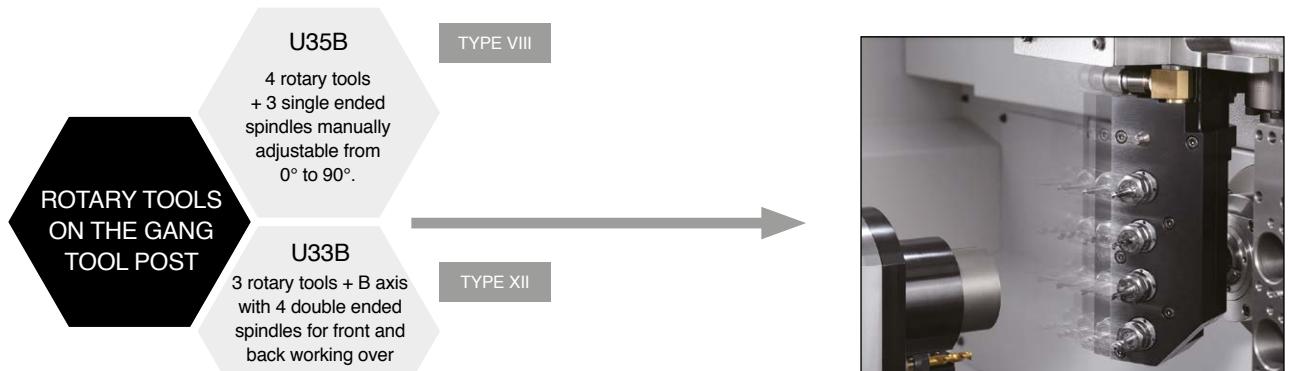

Features a B axis for rotary tools on the gang tool posts of Type XII machines as standard; capable of working on both spindles it can be programmed over a 135° range from 90° to -45°.

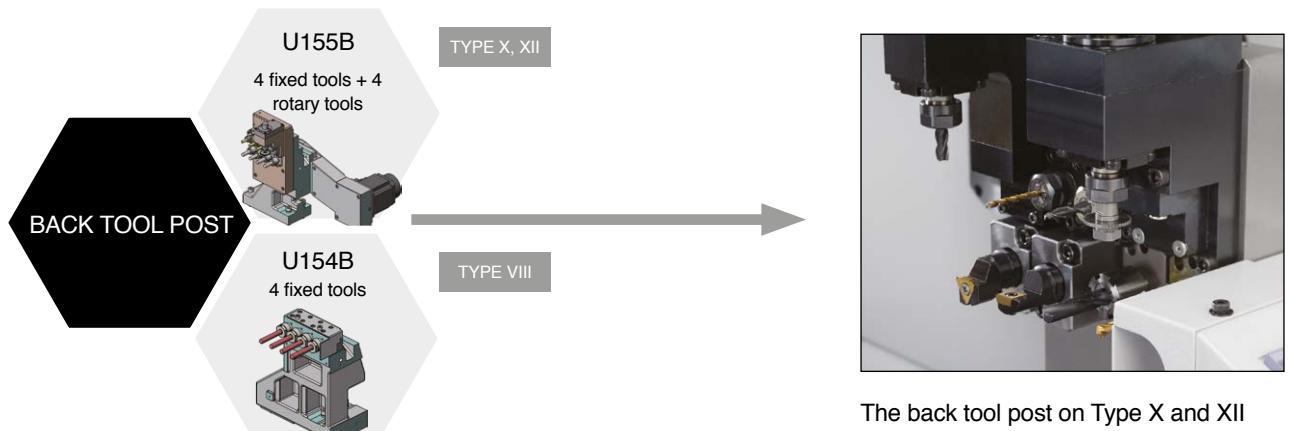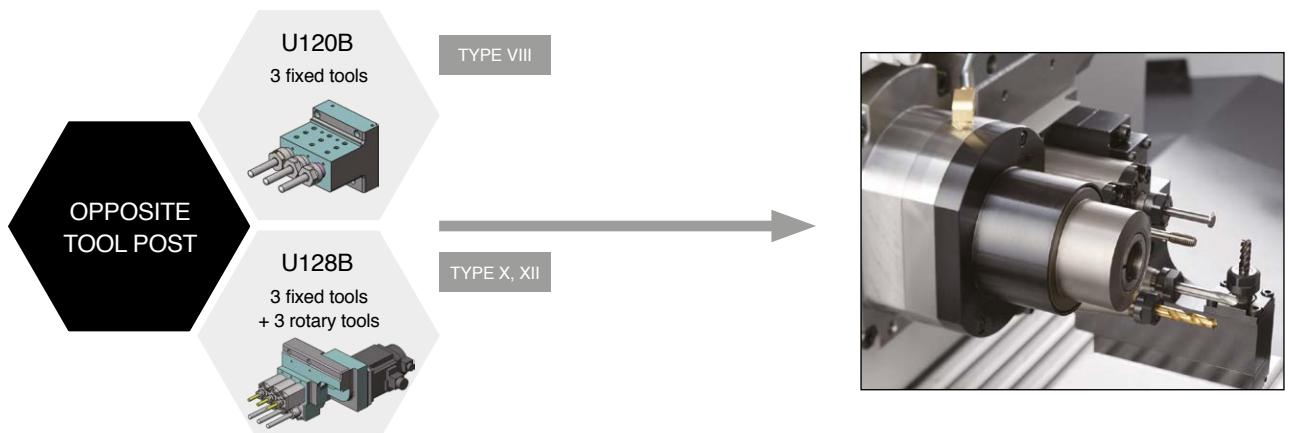

The back tool post on Type X and XII machines can accommodate a total of 8 tools: 4 rotary tools in the upper row and 4 fixed tools in the lower row.

Designed for optimum usability



The L20 has adopted a modular design, but also focuses on operability and working convenience.

The high level of basic performance found in features like the adjustable operation panel that makes it possible to monitor the interior of the cutting room while looking at the operation screen, the centralised lubrication system that helps to lessen the maintenance workload and the coolant tank with a wide opening to facilitate chip clearance, makes the operators' daily work run smoothly.

What is more, material up to 25.4mm (1") can also be supplied as an option.

This expands the range of machinable workpieces beyond what was possible with the previous L20.

LFV Function (optional)

LFV technology

LFV* (low frequency vibration) is Citizens' latest, unique control technology which oscillates the X & Z servo axes in synchronisation with the spindle.

It offers unprecedented levels of chip control and is highly effective for both small diameter drilling and when machining difficult to cut materials.

Representation of the cutting



* "LFV" is a registered trademark of Citizen Watch Co., Ltd.

Vibration mode

Item	LFV mode 1	LFV mode 2
Operation	Multiple vibrations per spindle revolution	Multiple spindle revolutions per vibration
Specification	The axes execute multiple vibrations during one spindle revolution, reliably breaking chips up into small pieces.	Machining is carried out while rotating the spindle multiple revolutions per vibration
Application	Ideal for outer/inner diameter machining and groove machining	Ideal for micro-drilling, where peripheral speed is required
Waveform		

Comparison of chips

Material: SUS304 Weight: 14.3 g (same scale)



Chips generated by customary cutting

Chips generated by cutting using LFV

LFV specifications

Model	Type	Front side LFV (X1,Z1)	Back tools LFV (X2,Z2)
L20	Types VIII	○	○
	Types X, XII	○	×

Note 1. On the L20 X and XII models, LFV machining cannot be performed on the back (Z2) side.

Note 2. LFV machining cannot be performed with the Y axis.

Note 3. LFV machining can be performed simultaneously on a maximum of 1 pair of axes.

Note 4. Simultaneous LFV machining on the Z1 axis on the front side and Z2 axis on the back side is not possible (type VIII only).

Note 5. For LFV machining with rotary tools, the "LFV function" and "rotary tool feed per revolution" options are required.

Key features



Product receiver box

The workpiece gripped in the back spindle is unloaded into the product chute for collection.



Adjustable operation panel

By swiveling the adjustable operation panel, you can perform operations while watching the machining area.



In-machine lighting

Bright, highly visible LED lighting is standard giving a pleasant working area.



Coolant nozzle

A good supply of coolant is available from the numerous pipes throughout the working area.



Swarf tray

The large opening allows chips to be easily removed. Chip conveyor options are also available.



Central lubrication device

Supplying lubricating oil to all ball screws with this device eliminates the need for manual greasing.




NC program I/O

NC programs can be input and output via. USB memory stick, CompactFlash card, RS232 connection or (with optional PC-based software) via. Ethernet.



Workpiece conveyor

A parts conveyor can be specified to unload the parts safely to the edge of the machine.

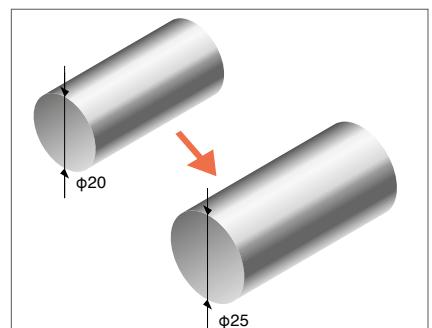

Support for stock up to 25.4mm (1'')


Fitting optional chuck devices enables supply of bar stock of up to 25.4mm (1"). Note: The long workpiece device can collect workpieces with a diameter of up to 20 mm.

Intuitive screen display is readable at a glance




Equipped with high-speed NC

The machine is equipped with the latest NC model to drastically reduce the start-up and screen switching time compared to conventional machines with advanced functions.

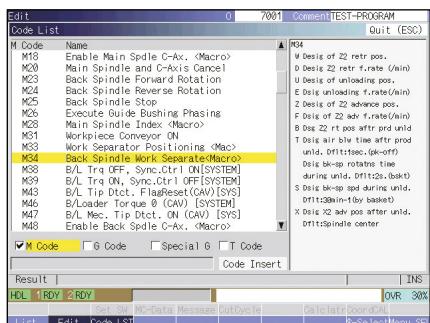


Display of code list

The function displays the list of G and M codes including explanations to aid programming.

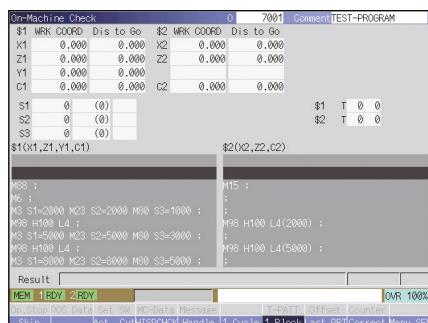


On-machine program check function

The program can be ran round using the handwheel giving enhanced user confidence. The program can run in forward or reverse directions and can be paused to edit before restarting.

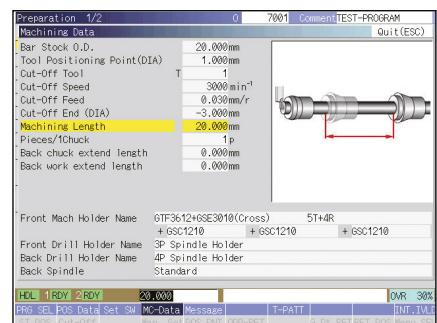

Display of easily understood illustrations

Illustrations appropriate for each item are displayed. You can see what they mean at a glance (the screen shown above displays the machining data).

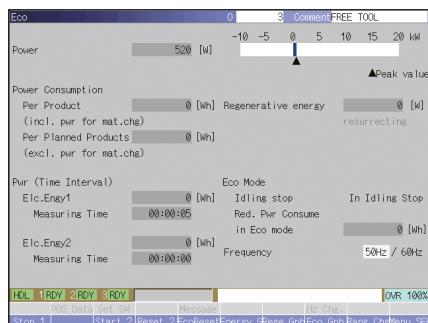

Eco screen

The current power consumption is shown on the screen, along with the cumulative power consumption and the power regeneration (generation) status.

Eco screen (example graph display)

The machine's power consumption can also be shown in the form of an easy-to-understand graph.

The next process starts before the current one ends


Cincom Control saves time between processes

Cincom Control

Citizen's unique control system realises rapid, yet smooth, operation reducing idle time and lowering cycle times.


Multiple tool post overlapping function

Independent opposite and gang tool posts are provided. In front machining, idle time has been completely eliminated by using a unique control method whereby the tool post to be used next starts the preparation for machining without waiting for the other one to complete its retraction operation.

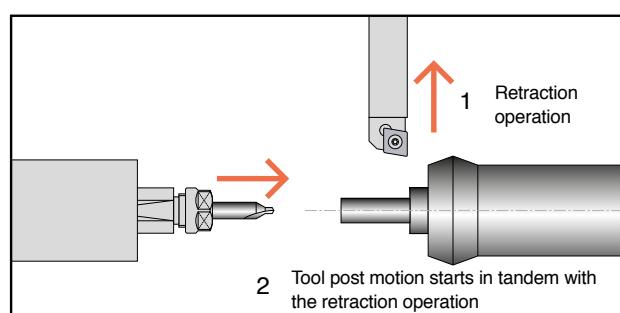


Direct spindle indexing function

This substantially reduces spindle indexing time. When indexing the spindle, this function allows the spindle to be decelerated and stopped at the required index position by specifying this position with a C axis command while the spindle is rotating. This eliminates the idle time up until rotation stops and improves working efficiency.



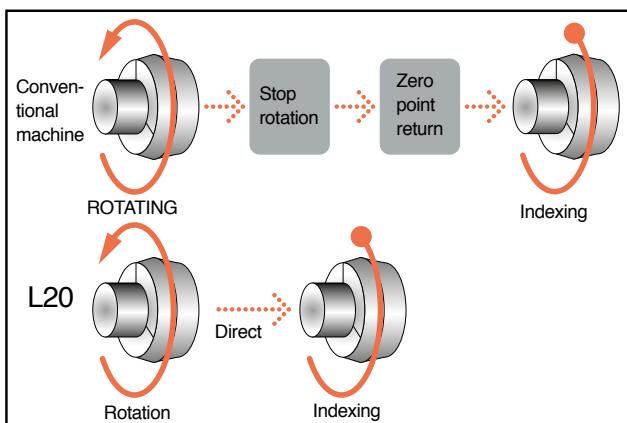


Machine layout

L20 Standard
Machine

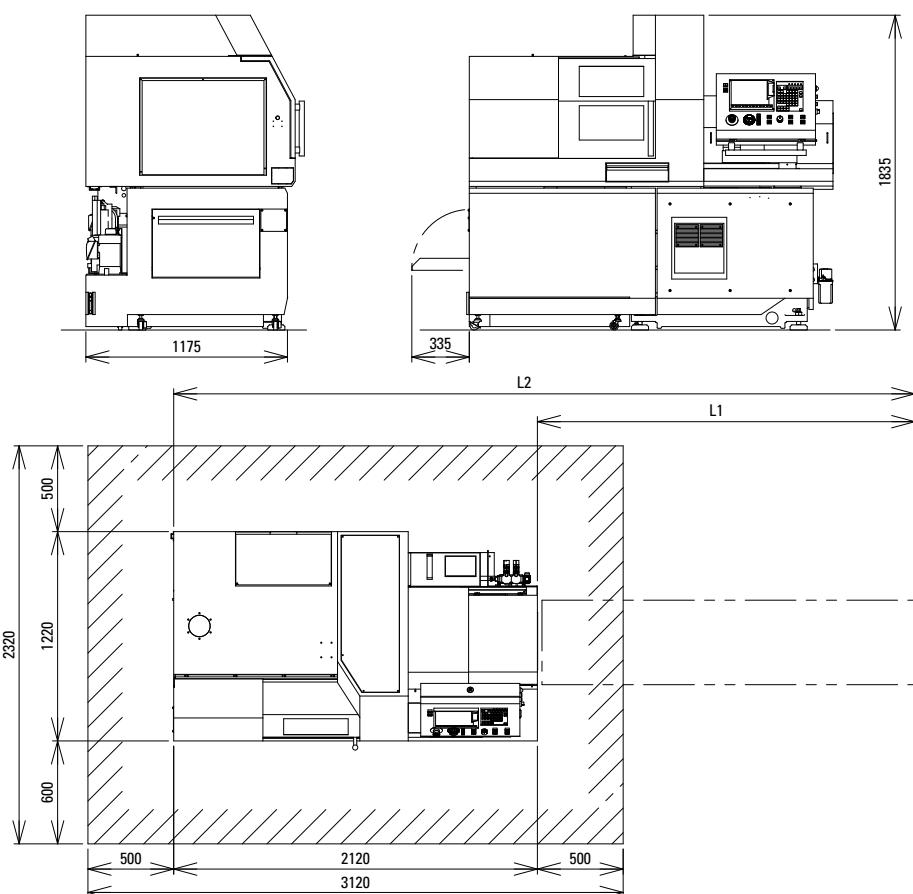

L20 Option-installed
Machine

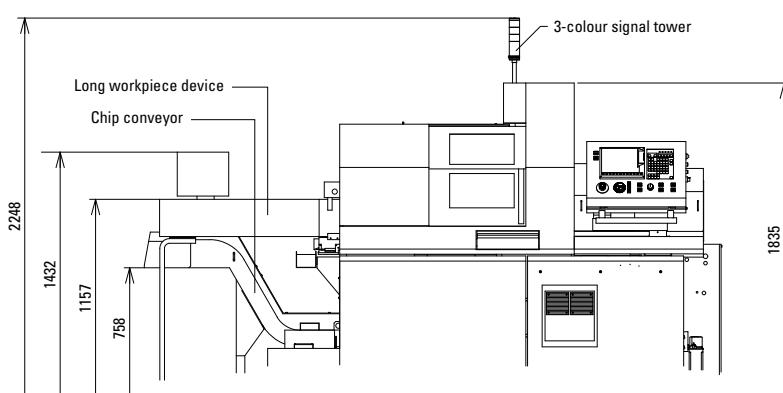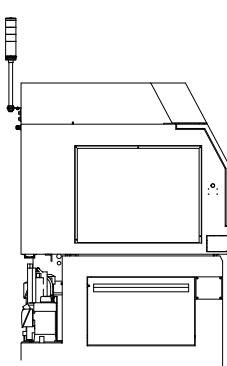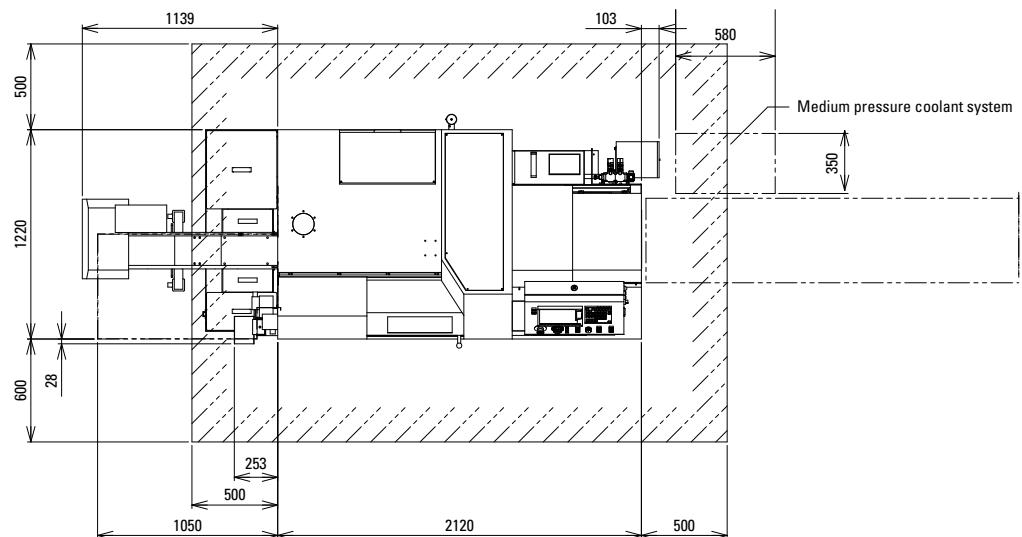

Machine specification

Item	L20			Standard accessories	
	Type VIII	Type X	Type XII	Standard accessories	Door lock
	L20E-2M8	L20E-2M10	L20E-2M12	Main spindle chucking unit	Cut-off tool breakage detector
Max. machining diameter (D)	20mm Dia. (25mm Dia. ^{OP})			Back spindle chucking unit	Lighting
Max. machining length (L)	GB: 200mm/1chucking (188mm 25mm Dia spec.) GBL: 2.5D			Gang rotary tool driving unit	Main spindle coolant unit
Spindle through-hole diameter	26mm Dia.			Coolant unit (with level detector)	Back tool post rotary unit *type X,XII
Main spindle speed	Max.10,000min ⁻¹			Lubricating oil supply unit (with level detector)	
Max. chuck diameter of the back spindle	20mm Dia. (25mm Dia. ^{OP})			Machine relocation detector	
Max. protrusion length of the back spindle workpiece	30mm			Special accessories	
Max. protrusion length	80mm			Rotary guide bushing unit	Coolant flow rate detector
Back spindle speed	Max. 10,000min ⁻¹			Workpiece conveyor	Signal lamp
Gang rotary tool				Chip conveyor	3-color signal tower
Spindle speed	Max. 9,000min ⁻¹ (Rating 4,500min ⁻¹)			Medium-pressure coolant unit	Front rotary tool unit *type X,XII
B-axis speed	12,000min ⁻¹			LFV	Workpiece separator
Back tool post rotary tool *type X, XII				Knock-out jig for through-hole workpiece	
Spindle speed	OP	Max. 7,500min ⁻¹ (Rating 6,000min ⁻¹)		Standard NC functions	
Front rotary tool *				CINCOM SYSTEM M70LPC-VU (Mitsubishi)	
Spindle speed	-	Max. 7,500min ⁻¹ (Rating 6,000min ⁻¹)		8.4 inch colour LCD	
Number of tools to be mounted max	37	44	40	USB slot,SD card slot	
Gang turning tool	5			Program storage capacity:40m(approx,16KB)	
Gang rotary tool	25	25	21	Tool offset pairs : 40	
Front drilling tool	3	6		Product counter indication (up to 8 digits)	
Back drilling tool	4	8		Operating time display function	
Tool size				Machine operation information display	
Gang turning tool	12mm Sq. (13mm Sq., 16mm Sq.)			Multiple repetitive cycle for turning	
Sleeve	19.05mm (3/4") DIA.			Interference check function	
Chuck and bushing				Spindle speed change detector	
Main spindle collet chuck	F25/F30 (OP)			Constant surface speed control function	
Back spindle collet chuck	F25/F30 (OP)			Automatic power-off function	
Rotary tool collet chuck	ER11, ER16			Main spindle indexing at 1° intervals	
Chuck for drill sleeves	ER11, ER16			On-machine program check function	
Guide bushing	B261			Chamfering, corner R	Nose radius compensation
Rapid feed rate				Eco indication	B axis control function *type XII
All axes (except Y2)	32m/min			Special NC functions	
Y2 axis	-	8m/min		Variable lead thread cutting	Optional block skip (9 sets)
Motors				Arc threading function	Back machining program skip function
Spindle drive	2.2/3.7kW			Geometric function	Tool life management I
Gang tool post rotary tool drive	2.2kW			Spindle synchronized function	Tool life management II
Back spindle drive	0.75/2.2kW			Spindle C axis function	External memory program driving
Back tool post rotary tool drive ¹	-	0.75kW		Milling interpolation	Submicron commands
Front rotary tool drive ²	0.75kW			Back spindle 1°indexing function	User macros
Coolant oil	0.4kW			Back spindle C axis function	Helical interpolation function
Lubricating oil	0.003kW			Back spindle chasing function	Hob function
Centre height	1,050mm			Canned cycle drilling	Polygon function
Rated power consumption	7.3kVA			Rigid tapping function	Inch command
Full-load current	32A			High speed Rigid tapping function	Sub inch command
Main breaker capacity	40A			Tool offset pairs: 80	Network I/O function
Air pressure	0.5MPa			Synchronised tapping phase adjustment function	
Weight	2,350kg	2,400kg		Differential speed rotary tool function	
				Program storage capacity 600m(approx. 240KB)	

*Front rotary tool drive unit is optional

CITIZEN

CITIZEN MACHINERY CO., LTD.

Japan

Citizen Machinery Co Ltd
4017-6 Miyota, Miyota-machi, Kitasaku-gun,
Nagano-ken, 389-0206, Japan

Tel: 81-267-32-5901 Fax: 81-267-32-5908

Europe - Germany

Citizen Machinery Europe GmbH
Mettinger Strasse 11, D-73728 Esslingen, Germany

Tel: 49-711-3906-100 Fax: 49-711-3906-106

Europe - UK

Citizen Machinery UK Ltd
1 Park Avenue, Bushey, WD23 2DA, UK

Tel: 44-1923-691500 Fax: 44-1923-691599

www.citizenmachinery.co.uk

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.

PRINTED IN THE UK - Mar 2018